



Submitted Model No.:

Specific Features:

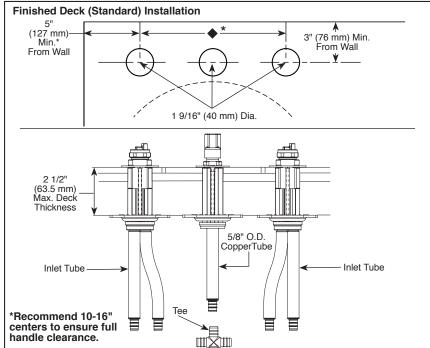

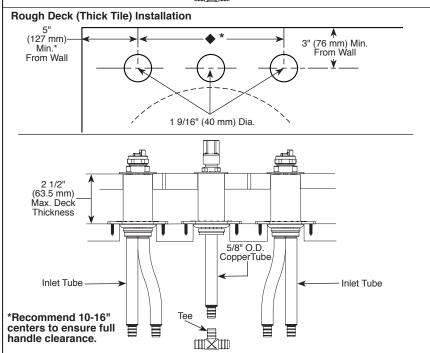

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



ROUGH-IN KIT, PEX

- Two Handle Roman Tub Rough-In Kit
- Flexible Deck or Ledge Mount
- Adjustable Rough-In for Thin or Thick Deck Installations
- Installed Before Mud and tile Applied in Thick Deck Situation
- Three Hole Installation
- PEX Tubing Installation Allows Flexible Handle Spacing
- Temperature and Volume Controlled with Handles
- Trim Kit Must Also be Ordered to Complete Installation

STANDARD SPECIFICATIONS

- Washerless
- Three hole installation
- R2707-MF uses PEX cold expansion type connections
- R2707-PX uses PEX crimp ring type connections
- Recommended minimum handle spacing is 10" (254 mm)
- Recommended maximum handle spacing is 16" (406 mm)
- 5/8" O.D. copper supply inlet and outlet tubes with integrated PEX fittings
- Flexible deck or ledge mount installation
- Solid fabricated brass end valves and spout body
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable seats operating in stainless steel lined sockets
- Hot and cold stems are interchangeable
- Temperature and volume controlled with handles
- All operating parts shall be replaceable from the top
- ♦ NOTE: Trim kit must also be ordered to complete installation. Refer to separate trim kit specifications to determine the best roughin kit and handle spacing for your situation.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

• ASME A112.18.1 / CSA B125.1



55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2014 Masco Corporation of Indiana